



How to sew hexagons together by machine.

Use the template found at the base of the Honeycomb[™] package to mark the 1/4" intersections on the wrong side of the hexagons.



2 Arrange the hexagons in the desired pattern. You will sew the hexagons together in vertical rows. Reduce the stitch length to 2.0 (13 stitches/inch). This will make it easier to start and stop on the 1/4" marks. First, sew the hexagons in rows. Layer 2 hexagons, right sides together, start sewing at the 1/4" mark, backstitch or lock the stitches. Use an accurate 1/4" seam allowance to sew the seam.

Stop at the 1/4" mark and backstitch. Row diagrams show seams finger-pressed open. Finish sewing the hexagons in rows.




Finger press the seams.


DO NOT press the seams! Leaving the seams unpressed until the end will make it much easier to maneuver the hexagons to sew the rows together.




4 Flip row B onto row A to align the two edges for sewing. Sweep any seams away from the hexagon so that the two hexagons lay flat and are aligned.

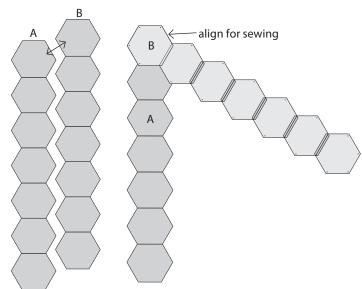

Start sewing at the 1/4" mark, then backstitch and continue to sew the 1/4" seam. Stop sewing at the 1/4" mark, backstitch.



Remove the hexagon rows from the sewing machine. Open the seam to make sure the stitches did not catch the next hexagon creating a pucker. Continue to sew the rows together, one hexagon side at a time. When a row is complete, add the next row until the top is done.

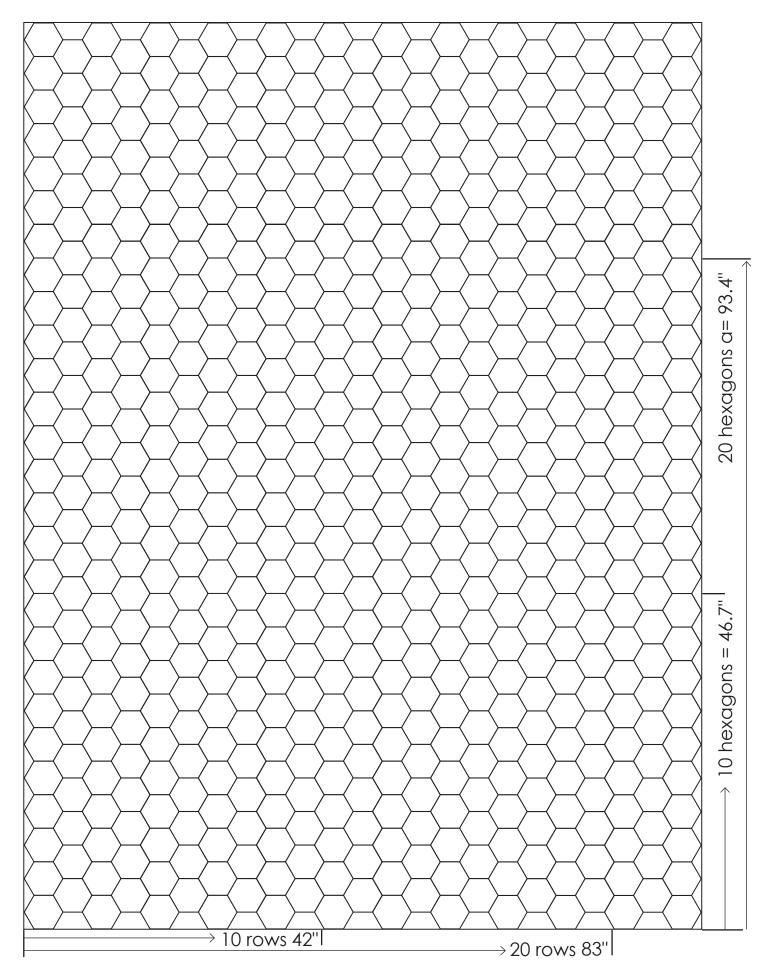

Honeycomb

www.modafabrics.com