



SLICE

CONTAINS: 48 - 10" TRIANGLES
IN 12 ASSORTED NEW BELLA™ COLORS

Quilt Size: 72" x 78"

Finished block size: 9" x 9"

Quilters Basics

Read instructions before beginning a project.

All instructions include a ¼" seam allowance.

Press as you go.

WOF = Width of Fabric

Construction

FLYING GEESE

Make 2 each of the following color combinations using the pre-cut triangles and the 16 background triangles to make 16 flying geese Sets. Press seam toward the darker fabric. Refer to diagram for color placement and piecing order. Refer to arrows for pressing direction for sets.

Set 1.....(2) Bkgd/ Color 2 Set 2.....(2) Bkgd/ Color 3 Set 3.....(2) Bkgd/ Color 5 Set 4.....(2) Bkgd/ Color 4 Set 5.....(2) Color 2/Color1 Set 6.....(2) Color 3/Color 8 Set 7.....(2) Color 5/Color 6

Set 8.....(2) Color 4/Color 11 Set 9.....(2) Color 1/Color 10

Set 10...(2) Color 8/Color 9 Set 11...(2) Color 6/Color 7

Set 12...(2) Color 11/Color 12 Set 13...(2) Bkgd/ Color 10

Set 14...(2) Bkgd/ Color 9 Set 15...(2) Bkgd/ Color 7

Set 16...(2) Bkgd/ Color 12



Make 2 half square triangle units



Make 1 Flying Geese Set

Make a total of 16 Sets

Cutting

Fabric 1

ALSO NEEDED:

First cut 2 - 10"xWOF strips

Fabric Requirements

1 **SLICE** (48 –10" triangles)

Color 1..... 9900-261

Color 2..... 9900-262

Color 3..... 9900-263

Color 4..... 9900-265

Color 5..... 9900-266

Color 6..... 9900-267

Color 7..... 9900-268

Color 8..... 9900-269

Color 9..... 9900-270

Color 10.... 9900-271

Color 11.... 9900-283

Color 12.... 9900-284

Fabric 2 – White (9900-98)

Fabric 3 – Binding (9900-266)

Backing 5 yds. – pieced across

Fabric 1 – Background (9900-236) 2³/₄ yds.

Subcut 8 - 10"x 10" squares cut once diagonally for flying geese Then clip and tear away selvages from remaining fabric. Trim fabric to measure 42"x $72\frac{1}{2}$ " for background.

3/4 yard of 22'' - 24'' fusible web (we used *Steam a Seam 2* (5424)

3/4 yd.


3/4 yd.


Fabric 2

Cut $1 - 1\frac{1}{2}$ "xWOF strip for anchor "rope" Use remaining fabric for anchor

Fabric 3

Cut $8 - 2\frac{1}{2}$ "xWOF strips for binding



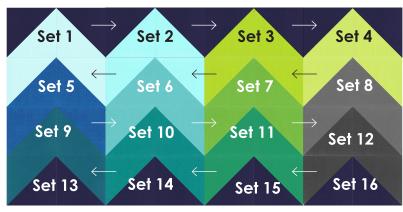

Flying Geese Section should measure 721/2"x361/2" with seams.

ANCHOR AND "ROPE"

- 1. Fold $1\frac{1}{2}$ "xWOF strip in half lengthwise. Stitch edges together using a scant $\frac{1}{4}$ " seam.
- 2. Roll seam allowance to back of sewn tube. Press. See diagram.
- 3. Trace anchor onto fusible web.
- 4. Fuse to Fabric 2 following manufacture's instructions. Cut out anchor shape.





























Sew the flying geese section to the long side of the 42" x 72½" dark blue rectangle. Be sure to pin at the beginning and end and matchthe middle of the geese section to the middle of the dark blue. Ease between the pins. Press toward the blue section.

ADD ANCHOR AND "ROPE"

Refer to quilt image and position anchor "rope" on quilt top. Pin as you go. Bottom end of "rope" should extend 1¼" beyond the background flying geese section seam (top of the anchor will cover open end of rope). Top end of "rope" should be even with the top of the quilt. Trim as needed.

Stitch "rope" to quilt top using a narrow zig zag stitch or a blind hem stitch.

Following manufacturers directions fuse prepared anchor into place. Be sure to cover open end of "rope" with the top of the anchor. Finish with a narrow zig zag stitch or other decorative stitches.



Finishing

Using a diagonal seam, join the $8 - 2\frac{1}{2}$ "xWOF strips end to end. Press seams open. Fold prepared strip in half wrong sides together and press to make the binding.

Layer, Quilt and Bind

Make a Splash,

Template is full size.
Place dotted line on fold and trace.

Template does not include seam allowance







